TELESCOPIC BOOM

H 21 TX

- 55 ft 9 in (17 m) outreach.
- 507 lb (230kg) platform capacity.
- Foam filled tyres.
- 13 in (35 cm) ground clearance.

Haulotte GROUP

H 21 TX

Telescopic boom

The Haulotte® advantages

- Standard foam filled tyres.
- 4 wheel drive.
- Length : 9.1 / 29 ft 10 in.
- Hydraulic differential lock for demanding rough terrain conditions.
- Work platform overload limiter increases safety.
- Large & robust slewing ring
- Simultaneous proportional controls for all movements.
- Side mounted engine for easy access & maintenance.
- Improved productivity through fast boom movement speeds.
- Robust, reliable, easy to maintain design.

STANDARD FEATURES

- 62 ft (18.86 m) platform height
- 5° tilt alarm
- 180° hydraulic platform basket rotation
- Silent pack Hatz diesel engine
- Free wheeling device
- Electric emergency lowering system
- Safe use in winds up to 28 mph (45 km/h)
- Simple uncomplicated operational controls
- Turret slewing lock rod
- Hourmeter
- Towing hooks / lifting eyes
- 2 hooks for safety harness in platform

OPTIONS & ACCESSORIES

- Large platform (2.3 m x 0.8 m / 91 in X 32 in)
- Rotating beacon
- Catalytic exhaust
- Working light
- Travel alarm
- Power line to cage
- Encoded starting device
- Hot countries kit
- On-board generator 3,3 kW
- Capacity of 794 lb (360kg) with a wind up to 37 mph (60km/h). (Weight of the machine : 27871 lb /12640kg)

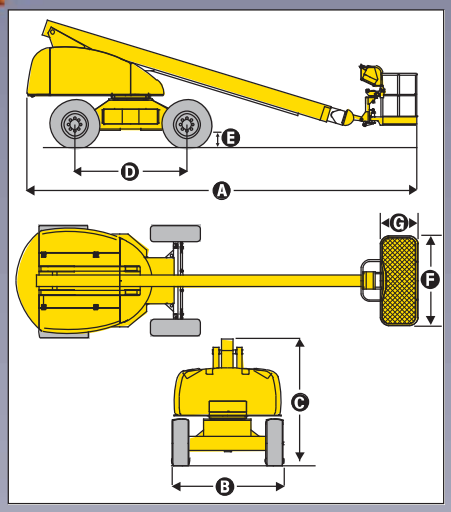

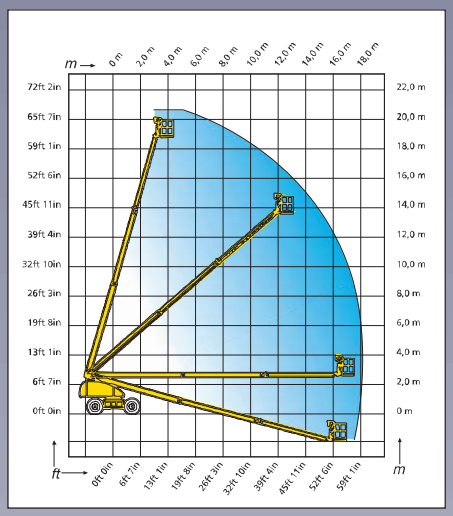

SPECIFICATIONS		
Working Height	68 ft 3 in	20.8 m
Platform Height	61 ft 8 in	18.8 m
Horizontal Reach	56 ft 3 in	17.2 m
Platform Capacity	507 lb	230 kg
Ⓐ Length	29 ft 10 in	9.1m
Ⓑ Width	8 ft 2 in	2.48 m
Ⓒ Stowed Height	9 ft 5 in	2.86 m
Ⓓ Wheelbase	8 ft 2 in	2.49 m
Ⓔ Ground clearance	13 in	35 cm
Ⓕ x Ⓖ Platform size	71 in x 32 in	1.8 m x 0.8 m
Tailswing	42 in	1.1 m
Drive speed	0.9 - 3.1 mph	1.5 - 5.0 km/h
Outside turning radius	20 ft 2 in	6.15 m
Turntable Rotation - Continuous	360°	360°
Platform Rotation	180°	180°
Power source	Diesel 43.6 hp / 32.1 KW	
Controls	12 V proportional	
Gradeability	40%	
Tyres (Foam Filled)	15 R 22	
Hydraulic tank	40 gallons	150 l
Fuel tank	40 gallons	150 l
Weight	25 909 lb	11 750 kg

AS 1418.10

Registered Quality System ISO 9001 V2000 Haulotte CERTIFIED COMPANY

CE

2420604550 - Ed. 03/2006 - Copyright © by Pinguely-Haulotte – products specifications are subject to change without notice – non contractual pictures.

HAULOTTE UK LTD • STAFFORD PARK 6 • TELFORD - SHROPSHIRE TF3 3AT • TEL : +44 (0)1952 292753 • FAX : +44 (0)1952 292758 • E.mail : haulotte@haulotte.co.uk
HAULOTTE SCANDINAVIA AB • ARÖDS INDUSTRIVÄG 66 B • 422 43 HISINGS BACKA - SWEDEN • TEL : +46 31 744 32 90 • FAX : +46 31 744 32 99 • E-mail : hwallin@haulotte.se • www.haulotte.se
HAULOTTE AUSTRALIA PTY LTD • 65 LICOLA CRES • DANDENONG - VIC - 3175 • TEL : +61 (0)3 9706 6787 • FAX : +61 (0)3 9706 6797 • E.mail : sales@haulotte.com.au
HAULOTTE SINGAPORE PTE. LTD • 26 Changi North Road Way • SINGAPORE 498812 • TEL: +65 6536 3989 • FAX: +65 6536 3969 • E-mail: haulotteasia@haulotte.com

Haulotte GROUP

Haulotte Group - La Péronnière - BP 9 - 42152 l'Horme - France • Tél : +33 (0)4 77 29 24 24 - Fax : +33 (0)4 77 29 43 95
e.mail - haulotte@haulotte.com • web : http://www.haulotte.com